


2.00mm Tooling Kit for Stiff Stay Machines

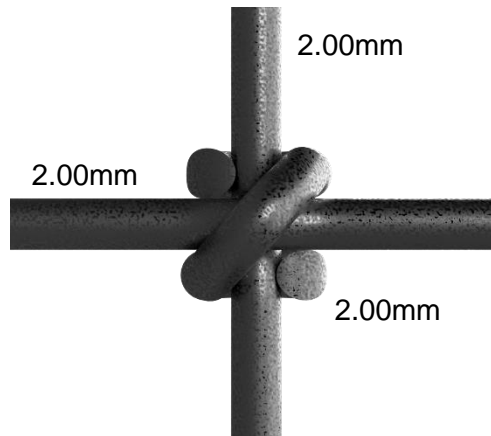

The 2.00mm Stiff Stay tooling kit allows for the manufacture of lighter fence with 2.00mm line-wire (Horizontal), stay-wire (Vertical), and knot-wire. This wire gauge decrease allows for lighter and more cost effective fence to be manufactured. Applications for the fence include:

- Fencing small animals
- Chicken Fence
- Protection of young trees or other plants.

The tooling kit can be used on all South Fence Stiff Stay machines.

Once fitted change overs to different 2.00mm fence specifications are exactly the same as for the standard 2.50mm fence.

Fence Specifications

All fence specifications that can be run in 2.50mm can also be run in 2.00mm with this kit. **As an added benefit, there are no restriction on the number of 50mm (2") line-wire spacings allowed. This is a significant improvement on standard 2.50mm fence that is limited to a maximum of 5 consecutive 50mm (2") line-wire spacings.**

Wire Specifications

Line-wire:	2.00mm High Tensile Wire	(525-1390 N/mm ² or 34-90 Tons/sq in)
Stay-wire:	2.00mm Medium Tensile Wire	(525-850 N/mm ² or 34-55 Tons/sq in)
Knot-wire:	2.00mm Soft Wire	(400-525 N/mm ² or 26-34 Tons/sq in)

Contact South Fence Machinery today for more information!